


Addendum No. 1
September 30, 2016

RE: LARAMIE COUNTY COMMUNITY COLLEGE
GATEWAY FOR SECONDARY ENTRIES
Cheyenne, Wyoming
ByAM Project #1202.2

FROM: By Architectural Means, PC
311 West 18th Street, Suite 300
Cheyenne, Wyoming 82001
307-637-7300

TO: Prospective Bidders and Plan Holders of Record

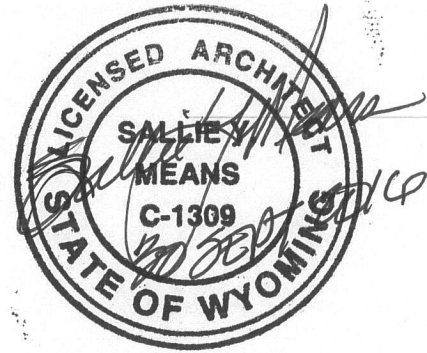

This Addendum shall be considered part of the Contract Documents for this Project and must be returned with all other Contract Documents after the bid date. Where provisions of the following items differ from those of the original Contract Documents dated September 19, 2016 this addendum shall govern and take precedence.

Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification.

This Addendum consists of 2 typed pages.

MODIFICATIONS TO THE PROJECT MANUAL

MODIFICATIONS TO THE TECHNICAL SPECIFICATIONS

1) Section 10 14 00 – **SIGNAGE, PART 2 PRODUCTS:** Revise to read:

2.01 MANUFACTURERS

- A. Signs: FLAT CUT ALUMINUM LOGO
1. Cosco Industries: www.coscoarchitecturalsigns.com.
 2. Gemini Signs: www.geminisignletters.com.
 3. InPro Corporation: www.inprocorp.com.
 4. Schlosser Signs, Inc. Loveland Colorado (970-593-1334)
 4. Substitutions: See Section 01 60 00 - Product Requirements.

2.02 SIGNAGE APPLICATIONS

- A. Site Entrance Identification Signs – Pin mounted Logo

2.03 ALUMINUM CAMPUS LOGO

- A. Flat Cut Aluminum Logo - Artwork to be provided by Architect.
1. Metals: ¼" Aluminum, provide sample for approval by Architect.
 2. Finish: Painted as indicated on drawings.
 3. Cut Out Void: Note: the logo requires cut out for image of eagle required.
 4. Mounting: Pin Mounted as indicated on Drawings; Coordinate pin depth with stone substrate.

MODIFICATIONS/CLARIFICATIONS TO THE DRAWINGS

- 1) Clarification: Grading for drainage improvements shall finish grade to allow 3 inches top soil depth for graded swale areas. Topsoil will be provided by future landscape bid package.
- 2) Clarification: ADA Ramp truncated domes are required.
- 3) Clarification: Contractor's option to provide saw cut joints in lieu of tooled joints.
- 4) Clarification: The Project scope does include boring for irrigation mains as shown the Civil drawings. Additional boring will be provided in the future Landscape bid package for additional distribution irrigation lines at the secondary entries.

APPROVALS – None included with this addendum

END OF ADDENDUM NO. 1